

Peace of mind is knowing you are recording the crime

Connectors *Plus*



NDAA
COMPLIANT PRODUCTS

We take your safety seriously
Shop our NDAA compliant products
approved for Government use in the USA.

PRODUCT CATALOG

2021 VOLUME #1

CALL US TODAY! 866.666.9004 | CONNECTORSPLUSINC.COM

HI-RES NVR SYSTEMS



- Works with ONVIF or other supported IP cameras
- Local HDMI main monitor output with 4K Support
- Up to 8 Megapixel Resolution Recording
- Local VGA main monitor output up to 1080p
- True P2P Connectivity with QR Code Connect
- Multiple video search options including Analytic and Thumbnail Search for quick retrieval of footage.
- Smart Analytic Support
- H.265 Video Compression
- Free iOS & Android Apps for Smart Phones & Tablets
- Free Central Management Software (CMS) to manage multiple units & sites from a single platform
- Free MAC client software to easily manage your system from your Apple computer

PN1B-4X4

4 CH NVR with 4 Plug & Play Ports

- 40 Mbps Bit Rate Input
- Supports up to 4 CH simultaneous playback
- 1 HD Bay

2TB HDD:

4TB HDD:

6TB HDD:

PN1B-8X8

8 CH NVR with 8 Plug & Play Ports

- 80 Mbps Bit Rate Input
- Supports up to 8 CH simultaneous playback
- 1 HD Bay

2TB HDD:

4TB HDD:

6TB HDD:

8TB HDD:

10TB HDD:

PN1A-8X8F

8 CH NVR w 8 CH PoE & AI Function

- 80 Mbps Bit Rate Input
- Supports up to 8 CH simultaneous playback
- True Facial Recognition Capable with Compatible Camera
- 1 HD Bay

2TB HDD:

4TB HDD:

6TB HDD:

8TB HDD:

10TB HDD:

PN1A-16X16-2

16 CH NVR w 16 CH PoE

- 16 CH NVR with 16 Plug & Play Ports
- 112 Mbps Bit Rate Input
- Supports up to 16 CH simultaneous playback
- 2 HD Bays

2TB HDD:

4TB HDD:

6TB HDD:

8TB HDD:

10TB HDD:

12TB HDD:

PN1A-16X16F

16 CH NVR w 16 CH PoE & AI Function

- 16 CH NVR with 16 Plug & Play Ports
- True Facial Recognition Capable with Compatible Camera
- 256 Mbps Bit Rate Input
- Supports up to 16 CH simultaneous playback
- 4 HD Bays

2TB HDD:

4TB HDD:

6TB HDD:

8TB HDD:

10TB HDD:

12TB HDD:

PN1A-32X16F

32 CH NVR w 16 CH PoE & AI Function

- 32 CH NVR with 16 Plug & Play Ports
- True Facial Recognition Capable with Compatible Camera
- 256 Mbps Bit Rate Input
- Supports up to 16 CH simultaneous playback
- 8 HD Bays

4TB HDD:

6TB HDD:

8TB HDD:

10TB HDD:

12TB HDD:

PN3A-64

64 Ch NVR, 8 HD Bays

- 64 Channel IP Camera Input
- 320 Mbs Bit Rate Input
- Dual Gigabit Network Interfaces
- Supports up to 16 CH simultaneous playback

4TB HDD:

6TB HDD:

8TB HDD:

10TB HDD:

12TB HDD:

*Please call for HD storage over 12 TB HDD.



5-8 MP IP CAMERAS

PAR-P5BIR-LC
PAR-P8BIR-LC

IP Outdoor Mini Bullet Camera: 5 or 8 MP

- 2.8 mm Lens
- 65' IR Range
- D-WDR
- PoE/12VDC



PAR-P5BIRA2812-LC
PAR-P8BIRA2812-LC

IP Outdoor Bullet Camera: 5 or 8 MP

- Motorized A/F 2.8-12 mm Lens
- D-WDR
- 164' IR Range
- PoE/12VDC



PAR-P5DRIR-LC
PAR-P8DRIR-LC

IP Outdoor Vandal Dome Camera: 5 or 8 MP

- 2.8 mm Lens
- 65' IR Range
- D-WDR
- PoE/12VDC



PAR-P5DRIRA2812-LC
PAR-P8DRIRA2812-LC

IP Outdoor Vandal Dome Camera: 5 or 8 MP

- Motorized A/F 2.8-12 mm Lens
- 164' IR Range
- D-WDR
- PoE/12VDC



PAR-P5TXIR-LC
PAR-P5TXIR-LC(B)
PAR-P8TXIR-LC

IP Outdoor Turret Camera: 5 or 8 MP

- 2.8 mm Lens
- 65' IR Range
- D-WDR
- Built-in Mic
- PoE/12VDC
- 5 MP Available in White or Black Housing



PAR-P5TXIRA2812-LC
PAR-P8TXIRA2812-LC

IP Outdoor Turret Camera: 5 or 8 MP

- Motorized A/F 2.8-12 mm Lens
- 164' IR Range
- D-WDR
- Built-in Mic
- PoE/12VDC



4 & 8 MP AI CAMERAS

check out our new AI cameras with people and vehicle object detection

PAR-P4BIR-AI

PAR-P8BIR-AI

IP Outdoor Mini Bullet Camera: 4 or 8MP

- 2.8 mm Lens
- True AI
- 65' IR Range
- WDR
- Audio Input
- PoE/12VDC
- Facial Rec



PAR-P4BIRA2812-AI

PAR-P8BIRA2812-AI

IP Outdoor Bullet Camera: 4 or 8 MP

- Motorized A/F 2.8-12mm Lens
- True AI
- 164' IR Range
- WDR
- Audio Input
- PoE/12VDC
- Facial Rec



PAR-P4DRIR-AI

PAR-P8DRIR-AI

IP Outdoor Vandal Dome: 4 or 8 MP

- 2.8 mm Lens
- True AI
- 65' IR Range
- WDR
- Audio Input
- Built-in Mlc
- PoE/12VDC
- Facial Rec



PAR-P4DRIRA2812-AI

PAR-P8DRIRA2812-AI

IP Outdoor Vandal Dome: 4 or 8 MP

- Motorized A/F 2.8-12mm Lens
- True AI
- 164' IR Range
- WDR
- Audio Input/Output
- Built-in Mic
- PoE/12VDC
- Facial Rec



PAR-P4TXIR-AI

PAR-P4TXIR28B-AI

PAR-P8TXIR-AI

IP Outdoor Turret Camera: 4 or 8 MP

- 2.8 mm Lens
- True AI
- 65' IR Range
- WDR
- Audio Input
- Built-in Mic
- PoE/12VDC
- Facial Rec



PAR-P4TXIRA2812-AI

PAR-P8TXIRA2812-AI

IP Outdoor Turret Camera: 4 or 8 MP

- Motorized A/F 2.8-12 mm Lens
- True AI
- 164' IR Range
- WDR
- Audio Input
- Built-in Mic
- PoE/12VDC
- Facial Rec



PAR-P4UFO-AI

4 MP IP Indoor Low Profile Dome

- 2.8 mm Fixed Lens
- True AI
- IR Range up to 65'
- WDR
- Built-in Mic
- Micro SD Slot
- 12VDC/PoE
- Facial Rec



SPECIALTY IP CAMERAS

PAR-P2ELEV 2 MP (Indoor Use) Metal Plate Elevator Camera

- 2.8 mm Lens
- WDR
- Covert IR Range 82 Feet
- PoE/DC12



CPI-EP4MIBP 4 MP Metal Case Camera

- 4 MP IP Plug & Play Indoor Metal Case Camera
- WDR
- PoE/DC12V
- 3.7 mm Lens



CPI-EP5PIR 5 MP IP Indoor Covert PIR Housing

- 4 MP IP Plug & Play Indoor
- WDR
- PoE/DC12V. 3.7mm
- White Body

(PIR is Non-functioning)



CPI-EP5SMOKE 5 MP IP Indoor Covert Smoke Detector

- 4 MP IP Plug & Play Indoor
- WDR
- PoE/DC12V
- 2.8mm Lens
- White Housing



PAR-P2LPR722 2MP Starlight LICENSE PLATE CAPTURE IP Bullet Camera

- 2 MP IP License Plate Recognition Outdoor Bullet Camera
- 7-22mm Motorized A/F
- Starlight Illumination
- 328' IR Range
- WDR
- Audio Input
- PoE/12VDC



PAR-P8PANMULTI-AI 8 MP IP Outdoor Bullet with 4 Fixed Lenses (3.3 mm)

- Starlight 180 Degree Panoramic IP Camera
- WDR
- 65' IR Range
- SD Card Slot
- PoE/DC12V



PAR-P6PAN 6 Megapixel Panoramic Camera, Fixed Lens

- 6 MP IP Outdoor Panoramic Camera
- 98' IR Range
- CVBS Output
- Built-in Mic
- SD Card Slot
- PoE/12VDC



3 MP Doorbell Camera

Video Intercom with noise suppression and echo cancellation. Supports audio/video communication with the mobile app. Motion Detection that sends video clips to your phone.

HNDB313-W

- 2.2mm Fixed Lens with 180° View
- H.264 Compression
- Digital WDR
- 16' IR Range with Self-Adaptive IR
- Starlight Illumination
- One-touch calling
- IP65 Resistant
- 8 - 24VAC
- Micro SD Slot for Local Storage: Up to 128GB
- Free iOS & Android Apps for Smart Phones & Tablets



IP PTZ Cameras

VIS-P5DIPTZXIRA27135 5 MP Indoor Mini PTZ

- 5MP Starlight Illumination
- Motorized Auto-Focus 2.7-13.5mm Lens
- Indoor Only
- Micro SD Slot: Up to 256GB
- 12VDC/PoE Operation
- Two Way Audio Built in



PAR-P3C2PTXIR20 Hybrid PTZ (3 MP IP/2 MP TVI/AHD)

- 3 Megapixel (2048X1536) IP Res.
- 2 Megapixel 1080p (TVI/AHD) Res.
- True Day/Night
- D-WDR
- Smart EXIR Range up to 295'
- Micro SD Local Storage, 128GB
- Audio Input/Output
- 24VAC Operation
- Wall Bracket & Power Supply Included



PAR-P3PTXIR30 3 MP IP Outdoor PTZ Camera

- 30x Zoom
- 328' EXIR Range
- SD Card Slot
- AC24V
- White Housing
- Wall Mount & Power Supply Included



2 MP COLOR AT NIGHT WITH WHITE LIGHT True Facial Recognition Cameras*



PAR-P2FACEBIR8G1 2 MP 8mm Fixed Lens Outdoor Bullet

- IP True Facial Recognition with Compatible NVR
- IP67 Weather Resistant
- True Day/Night
- D-WDR
- CVBS Output
- 98' IR Range
- PoE/12VDC



PAR-P2FACE722G1 2 MP Outdoor Bullet with 7-22mm Auto-Focus Motorized Lens

- IP True Facial Recognition with Compatible NVR
- White Light Detection
- Audio Input/Output
- CVBS Output
- D-WDR
- SD Card Slot
- PoE/12VDC



PAR-P2FACETX2812G1 2 MP Outdoor Turret Camera with 2.8-12mm Auto-Focus Motorized Lens

- 2 MP IP True Facial Recognition with Compatible NVR
- White Light Detection
- CVBS Output
- D-WDR
- Built-in Mic
- SD Card Slot
- PoE/12VDC



VIS-P2BXIRA65143 Starlight Color at Night & Extreme Zoom

- 2 MP Starlight IP Outdoor Bullet Camera
- 6.5-143mm A/F Motorized Lens
- 656' EXIR Range
- SD Card Slot
- 24VAC/PoE+



*with Compatible NVR



UHD: Ultra HD 4K Monitors

3840 x 2160 Image,
HDMI, DisplayPort

- IMHD4K-24: 24"
- IMHD4K-28: 28"
- IMHD4K-32: 32"
- IMHD4K-43: 43"

MONITORS

HD-24HD
HD-32HD

24" or 32" Monitor with a looping TVI/AHD/CVI/ BNC Port

- 23.8" or 32" Full HD 1920 x 1080 LED Monitor
- HDMI, VGA, BNC Composite Inputs, BNC HD (TVI/AHD/CVI) Looping
- Audio



IMHD-22H 21.5" Full HD 1920 x 1080 LED Monitor with HDMI & VGA



5" ALL IN ONE CCTV TESTER HD-MT5500

- 5" IPS Touch Screen with 1920x1080 res.
- 8MP CVI/TVI/AHD camera test
- 8MP EX-SDI, HD-SDI
- H.265/H.264, 4K video display via mainstream
- VGA input & HDMI Input
- DC12V 3A, 48V PoE power output
- Rapid ONVIF, Create the test report & modify IP address, etc.
- Auto HD, auto recognize HD coax camera type and resolution
- RJ45 TDR cable test, cable quality test
- UTP cable test, detect the near-end, mid-end and far-end fault point of the network cable

POE SWITCHES

VIS-POE4-2

4 Port PoE Switch with 2 Up-link Ports

- (6) 10/100M adaptive RJ45 port, 4 port with PoE function.



VIS-POE8-2

8 Port PoE Switch with 2 Up-link Ports

- Provides 10/100 Base-TX ports, 2 10/100/1000 Base-TX



VIS-POE16-2

16 Port PoE Switch with 2 Up-Link Ports & 1 SFP Port

- Provides 16 10/100Base-TX ports and 2 Gigabit uplink ports



Long-Range PoE Switches

Up to 820 Foot Transmission
Distance!

- All 100Mbps ports support PoE
- PoE complies with IEEE802.3af/at, up to 30W for single port
- Up to 820 feet transmission distance on EXTEND mode



VIS-LRPOE8-2A:

8-Port PoE Switch with 2x Gig Combo Port

VIS-LRPOE16-2A:

16-Port PoE Switch with 2x Gig Combo Port

VIS-LRPOE24-2A:

24-Port PoE Switch with 2x Gig Combo Port

ALL-IN-ONE HD DVRS



- H.265 Video Compression (PD3A-32 H.264)
- True P2P Connectivity with QR Code Connect
- Simultaneous HDMI/VGA up to 1080p Resolution
- CVBS Main or Spot Monitor
- Smart Analytic Support - Line Crossing and Area Intrusion
- Multiple video search options including Analytical and Thumbnail Search for quick retrieval of footage.
- Watermarking
- Free iOS & Android Apps for Smart Phones & Tablets
- Free Central Management Software (CMS) to manage multiple units & sites from a single platform
- Free MAC client software to easily manage your system from your Apple computer

PD1B-4:

4 CH Universal Port Recorder

- (5 MP Lite) with 2 IP CH (5 MP)
- Up to 6 Cameras
- 1 HD Bay

2TB HDD:

4TB HDD:

6TB HDD:

PD2B-4:

4 CH Universal Port Recorder

- (8 MP) with 2 IP CH (8 MP)
- Up to 6 Cameras
- 1 HD Bay
- HDMI 4K

2TB HDD:

4TB HDD:

6TB HDD:

PD1B-8:

8 CH Universal Port Recorder

- (5 MP Lite) with 4 IP CH (5 MP)
- Up to 12 Cameras
- 1 HD Bay

2TB HDD:

4TB HDD:

6TB HDD:

8TB HDD:

10TB HDD:

PD2B-8LC:

8 CH Universal Port Recorder

- (8 MP) with 8 IP CH (8 MP)
- Up to 16 Cameras
- 1 HD Bay
- HDMI 4K

2TB HDD:

4TB HDD:

6TB HDD:

8TB HDD:

10TB HDD:

8 MP Recording on ALL Channels @ 15 FPS

PD3B-8:8 CH Universal Port Recorder

- (8 MP) with 8 IP CH (8 MP)
- Up to 16 Cameras
- 2 HD Bays
- HDMI 4K

2TB HDD:

4TB HDD:

6TB HDD:

8TB HDD:

10TB HDD:

PD1B-16:

16 CH Universal Port Recorder

- (5 MP Lite) with 8 IP CH (5 MP)
- Up to 24 Cameras
- 2 HD Bays

2TB HDD:

4TB HDD:

6TB HDD:

8TB HDD:

10TB HDD:

12TB HDD:

PD2B-16:

16 CH Universal Port Recorder

- (8 MP) with 8 IP CH (8 MP)
- Up to 24 Cameras
- 2 HD Bays
- HDMI 4K

2TB HDD:

4TB HDD:

6TB HDD:

8TB HDD:

10TB HDD:

12TB HDD:

PD1C-32

32 CH Universal Port Recorder

- (5 MP Lite) with 8 IP CH (5 MP)
- Up to 40 cameras total
- 8 HD Bays

4TB HDD:

6TB HDD:

8TB HDD:

10TB HDD:

12TB HDD:

*Please call for HDD storage over 12 TB HDD.

5MP HD OVER COAX CAMERAS

White-Light LED Night Color Technology

with Ultra-Starlight Image Sensor *Brighten the night with crisp color images*



- 5 MP 4-In-1 Outdoor Turret or Bullet with 24/7 Color
- 65' White Light Motion Sensor
- 2.8 mm Lens
- WDR
- Withstand up to -40° F Operation
- 12VDC

ELEV-C5TXIR28WL

ELEV-C5BXIR28WL



Full Color Picture 24/7 - Even in low light!

CPI-EC5TXIR

5-2 MP Turret, Fixed Lens


- Field Selectable TVI/AHD/CVI/CVBS Outdoor
- Operates in temperatures as low as -40°
- 65' IR Range
- D-WDR, 12VDC



CPI-EC5BXIR

5-2 MP Bullet, Fixed Lens

- 5-2 MP Field Selectable TVI/AHD/CVI/CVBS Outdoor
- Operates in temperatures as low as -40°
- 65' IR Range
- D-WDR
- 12VDC



CPI-EC5DRXIR

5-2 MP Dome, Fixed Lens

- 5-2 MP Field Selectable TVI/AHD/CVI/CVBS Outdoor Dome
- 65' IR Range
- D-WDR
- Operates to -40
- 12VDC



CPI-EC5LIR

5-2 MP Low Profile, Fixed Lens

- 5-2 MP Field Selectable TVI/AHD/CVI/CVBS Outdoor Low Profile Dome
- Operates to -40 degrees
- 49' IR Range
- D-WDR
- 12VDC



CPI-EC5TXIRA27135

5 MP Turret, 2.7-13.5mm A/F Motorized

- 5 MP TVI/AHD/CVI/CVBS Outdoor Turret
- 2.7-13.5mm Auto-Focus Motorized Lens
- 98' IR Range
- D-WDR
- Operates up to -40
- 12VDC



CPI-EC5DRXIRA27135

5 MP Dome, 2.7-13.5mm A/F Motorized

- 5 MP TVI/AHD/CVI/CVBS Outdoor Armor Dome
- 2.7-13.5mm Auto-Focus Motorized Lens
- 98' IR Range
- D-WDR
- Operates up to -40
- 12VDC



CPI-EC5BXIRA27135

5 MP Bullet, 2.7-13.5mm A/F Motorized

- 5 MP TVI/AHD/CVI/CVBS Outdoor Bullet
- 2.7-13.5mm Auto-Focus Motorized Lens
- Operates up to -40
- 98' IR Range
- D-WDR
- 12VDC



PAR-ALLDRXIRBD

Dome with Internal Built-in Balun & BNC

- 2.8mm lens
- 5 MP TVI/AHD/CVI (4MP)/Analog Outdoor Camera
- 65' IR Range
- D-WDR
- Dual Voltage



CPI-A5MINI/2.8

5 MP Outdoor Mini Turret, Fixed Lens, 12VDC

- 5 MP TVI/AHD/CVI/CVBS
- Fixed 2.8 mm Lens
- 32' IR Range
- D-WDR
- 12VDC
- Available in White or Grey



CPI-UC5PAN

5 MP TVI Indoor Panoramic Camera, Fixed Lens & Built-In Mic

- 5 MP Resolution (2592 x 1944)
- 60' IR Range with EXIR Technology
- 12VDC Only Operation
- Up The Cable (UTC) Function
- Fixed 1.1 mm Lens
- True Day/Night
- Indoor Only



ELEV-ALLPIR5

5 MP TVI/AHD/CVI/CVBS Indoor Covert Functioning PIR Camera

- 3.7 mm Lens
- Built-In Mic
- D-WDR
- 12VDC



ELEV-ALL5MIP

5 MP TVI/AHD/CVI/CVBS Pinhole Camera

- 2.8mm Fixed Lens
- D-WDR
- 12VDC



ELEV-ALLSMOKE5

5 MP TVI/AHD/CVI/CVBS Indoor Covert Smoke Detector Camera

- 2.8 mm Lens
- D-WDR
- DC12V



8 MP INDOOR/OUTDOOR HD COAX CAMERAS

PAR-C8BIR

8 MP 2.8 mm Fixed Lens

Bullet Camera

- TVI/AHD/CVI/Analog 960H
- D-WDR
- UTC Function
- 65' Smart IR Distance
- True Day/Night
- 12VDC



PAR-C8BIRA2812

8 MP Motorized Auto-focus

2.8-12mm Bullet Camera

- TVI/CVI/AHD/Analog 960H
- True Day/Night
- D-WDR
- 98' Smart IR Range
- 12VDC



PAR-C8BIRAL2812

8 MP Motorized Auto-focus 2.8-12mm

Long Range Bullet Camera

- TVI/CVI/AHD/Analog 960H
- True Day/Night
- D-WDR
- 164' Smart IR Range
- 12VDC



PAR-C8DRIR

8 MP 2.8 mm Fixed Lens

Dome Camera

- TVI/AHD/CVI/Analog 960H
- D-WDR
- UTC Function
- 65' Smart IR Distance
- True Day/Night
- 12VDC



PAR-C8DRIRA2812

8 MP Motorized Auto-focus 2.8-12mm

Dome Camera

- TVI/CVI/AHD/Analog 960H
- True Day/Night
- D-WDR
- 98' Smart IR Range
- 12VDC



PAR-C8TIR28

8 MP 2.8 mm Fixed Lens Turret Camera

- TVI/AHD/CVI/Analog 960H
- D-WDR
- UTC Function
- 65' Smart IR Distance
- True Day/Night
- 12VDC



PAR-C8TXIRA2812

8 MP Motorized Auto-focus

2.8-12mm Turret Camera

- TVI/CVI/AHD/Analog 960H
- True Day/Night
- D-WDR
- 98' Smart IR Range
- 12VDC



ELEV-C8BXIR

8 MP TVI/AHD/CVI/CVBS Outdoor Bullet Camera

- 2.8mm Lens
- 98' IR Range
- D-WDR
- Operates up to -40
- 12VDC



ELEV-C8BXIRA27135

8 MP TVI/AHD/CVI/CVBS Outdoor Bullet Camera

- Motorized A/F 2.7-13.5 mm Lens
- 165' IR Range
- D-WDR
- Operates up to -40
- 12VDC



ELEV-C8TXIR

8 MP TVI/AHD/CVI/CVBS Outdoor Turret Camera

- 2.8 mm Lens
- 98' IR Range
- D-WDR
- Operates up to -40
- 12VDC



ELEV-C8TXIRA27135

8 MP TVI/AHD/CVI/CVBS Outdoor Bullet Camera

- Motorized A/F 2.7-13.5 mm Lens
- 114' IR Range
- D-WDR
- Operates up to -40
- 12VDC



2 MP COAX FULL COLOR PICTURE 24/7 - EVEN IN LOW LIGHT!



ULT-ALLTXIRWL28

- 2 MP 4-In-1 Outdoor Turret with 24/7 Color
- 65' White Light Motion Sensor
- 2.8 mm Lens
- WDR
- Withstand up to -40° F Operation
- 12VDC



2 MP HD Coax

CPI-A2MINITI

2 MP Outdoor Mini Turret, Fixed Lens, 12VDC

- 2 MP TVI/AHD/CVI/CVBS
- 32' IR Range
- D-WDR
- 12VDC
- Available in White



CPI-ALLDIRS2812D

2 MP Varifocal Indoor Dome, Dual Voltage

- 2 MP TVI/AHD/CVI/Analog
- 2.8-12mm
- 98' IR Range
- D-WDR
- Dual Voltage



CPI-EC2DRIRA2812D

2 MP Outdoor Motorized Varifocal Armor Dome with Dual Power

- 2 MP TVI/AHD/CVI, Analog Output
- 2.8-12mm Auto-Focus Motorized Lens
- 98' IR Range
- D-WDR
- Dual Voltage (12VDC / 24 VAC)



PAR-TURRET28A

2 MP TVI/AHD/CVI/Analog Outdoor Turret Camera

- 2.8 mm Lens
- D-WDR
- 65' IR Range
- Up The Cable (UTC) Function
- 12VDC Only Operation



CPI-EC2TXIR2812

2 MP Varifocal Turret

- 2 MP TVI/AHD/CVI/CVBS Outdoor Turret
- 2.8-12mm
- 98' IR Range
- D-WDR
- Operates to -40°
- 12VDC



PAR-ALLTXIRA2812D
2 MP TVI/AHD/CVI/Analog Outdoor Turret Camera

- 2.8-12mm A/F Motorized Lens
- 65' IR Range
- D-WDR
- Dual Voltage



CPI-EC2BXIR2812

2 MP Varifocal Bullet Camera

- 2 Megapixel TVI/AHD/CVI/CVBS Outdoor Bullet
- 2.8-12mm
- 114' IR Range
- D-WDR
- Operates -40°
- 12VDC



CPI-ALLBIRA650D

2 MP Outdoor Bullet, 6-50mm A/F Motorized, Dual Voltage

- 2 MP TVI/AHD/CVI/Analog
- 6-50mm Auto-Focus Motorized Lens
- 196' IR Range
- D-WDR



True WDR 2MP

U3W-1080P

2.4MP 4-In-1 HD IR Dome Camera

- 1/2.9" SONY 2.4MP CMOS Sensor
- 1080P/960H, with IR-CUT, Low Illumination, Real WDR, DNR, UTC, OSD 3DNR
- Sense-up, NEW Laser
- IR LED: 14µ x 24PCS IR range: 30M
- 2.8-12mm Manual Zoom Lens.
- 12V DC
- (Optional Deep Base)
- (UTC/COC) Control Over Coax



HD Coax License Plate Recognition Camera

ULT-C1LPR120

720P HD Motorized License Plate Recognition Bullet Camera

- 6-22mm Motorized Varifocal Lens
- True Day/Night
- 120' IR Range
- IP66 Weather Resistant
- 12VDC Operation



HD-Over-Coax Specialty Cameras

PAR-ALLELEV29

2 MP TVI/AHD/CVI/CVBS Indoor Metal Plate Elevator Camera

- 2.9 mm Lens
- Covert 32' IR Range
- D-WDR
- 12VDC



CPI-ASMOKE

2 MP Indoor Smoke Detector Housing

- 2 MP TVI/AHD/CVI/CVBS Indoor Covert Smoke Detector Camera
- 2.8mm lens
- D-WDR
- 12VDC



ELEV-ALLMIP

2 MP TVI/AHD/CVI/CVBS Pinhole Camera

- 2.8mm Fixed Lens
- D-WDR
- 12VDC



CPI-APIR

2 MP Indoor PIR

- 2 MP TVI/AHD/CVI/CVBS Indoor Covert PIR Camera
- 3.7mm lens
- D-WDR
- 12VDC



ULT-ALLCRB36

2 MP TVI/AHD/CVI/Analog Outdoor Mini Bullet Camera

- 3.6mm Lens
- D-WDR
- 12VDC



TVI/ANALOG CAMERAS

CPI-50WDR

Hi-RES Premium Box Camera with WDR

- High Resolution 1000 TVL
- Day & Night / DNR / WDR
- DC12V / AC24V Dual Power



ECB-700B

Hi-RES Economic Outdoor IR Ball Camera w 24 LED's (Black Body)

- Color 1/3" CMOS 700 TV Lines
- 3.6 mm Lens
- 24 pcs IR LED's with 50 FT Range
- 12VDC



BDS-2M8IR

HD-TVI 1080P (2MP)/Analog(CVBS) IP68 Outdoor IR Bullet Camera

- 1/2.9" Sony CMOS
- 2.8-12 mm Vari-focal Lens
- 8 COB IR LED's
- True Day & Night (ICR)
- AC 24V/DC 12V Dual Power



CPI-1KDN

Hi-RES Vandal-Proof Dome Camera with Vari-focal Lens

- High Resolution 1000 TVL
- DC Auto IRIS & TDN V/F Lens 2.8-12mm
- Day & Night / DNR / D-WDR
- DC12V / AC24V Dual Power



DWB-2

Dome Bracket for CPI-1KDN and IR-53VFA

IR-2MVFA

Anti-IR Reflection HD-TVI 1080P (2MP)/Analog(CVBS) IR IP68 Vanda Dome Camera

- 1/2.9" Sony CMOS
- 2.8-12 mm Filter Change AVF Mega-pixel Lens
- True Day & Night (ICR)
- AC 24V/DC 12V Dual Power



BC-72

Mini Ultra Hi-RES 960H Color Camera

- 1/3" SONY 960H Exview HAD CCD II
- 700 TV Lines Resolution
- 3.7 mm Fixed Cone Lens
- DC 12V



SCP-534

Hi-RES Varifocal Indoor Dome Camera

- 1000 TVL
- DC Auto IRIS & TDN V/F Lens 2.8-12mm
- Day & Night / DNR / D-WDR
- DC12 / AC24V Dual Power
- Available in Black or White Body



DBC-1000

Deluxe Vandalproof/Weatherproof Varifocal Infrared Ball Camera

- Razor Sharp High Res: 1000TV Lines
- 35 IR Led's enable viewing in total darkness to 75 FT
- 2.8-12 EXTERNAL adjustable Vari-focal
- Day & Night / 3DDNR (Digital Noise Reduction) & Smart IR
- DC 12V
- Available in Black or Ivory Body



DBC-2MW(DV)

HD-TVI 1080P (2MP)/Analog (CVBS) Outdoor IR Turret Camera

- 1/2.9" Sony CMOS
- 2.8-12 mm Vari-focal Lens
- 35 IR LED's
- True Day & Night (ICR)
- AC 24V/DC 12V Dual Power
- White Body



Lenses 1/3" Format

L-3.5-8M

- 3.5-8 mm Manual Iris Vari-focal Lens
- CS Mount, F1.4



L-6-60DCIR

- 6-60 mm DC Day Night



L-5-100 DC

- 5-100 mm DC Auto-Iris
- Varifocal Lens, CS Mount, F1.6



L-3.5-8DC

- 3.5-8 mm DC wAuto Iris
- Varifocal Lens, CS Mount, F1.4



MEGA-PIXEL CAMERA LENS

2M2812DC-IR

- 1/2.7" 2MP 2.8-12mm
- AI D/N IR Corrected
- CS-Mount CCTV Lens



Color Quad



CPI-Q401A
CCTV Analog Color Quad Processor, Quad Multiplexer, CCTV Quad Screen Splitter



Security Signs



SEC-SIGN

Warning Sign

Metal Construction. 10.5" X 8"

SEC-SIGN-2

English-Spanish Warning Sign.

Metal Construction. 8" X 12.5"



IP TRANSMISSION SOLUTIONS



IP01

Passive IP Over Coax Extender

To send IP camera signal over existing coaxial cable.

- No power required.
- Max transmission distance: 300M over RG6U, 200M over RG59U

IP02DK

IP over Coaxial/Cat5E Extender

To extend signal of IP camera or any TCP/IP devices for long distance up to 2KM.

- Dual cabling selection: coaxial or CAT5e
- Max transmission distance: 2,000M (Coaxial) 1,200M (CAT5e)



IP01H

Ethernet Switch with 4 Port BNC & 1 Port RJ45

To receive up to 4 ports IP signal from IP01 to BNC port. RJ45 out connects to NVR

- Max transmission distance: 200M over RG59U



IP09K Long Range IP Over CAT5e Extender

IP09CK Ethernet Extender over Coax

To send and extend TCP/IP signal over CAT5e/6 or Coaxial cable.

- Distance support: 500 meters at 100Mbps, 800 meters at 10Mbps



SR01X LAN Repeater

Extend IP signal over cost-effective CAT5e cable to up to 120M

- Support data rate at 10/100/1000 Mbps (Auto-detection)


PoE Transmission Solutions

IP01P

PoE Extender Over Coax

To extend PoE signal over coax cable.

- Max transmission distance: 100M



IP09P

PoE Extender over CAT5e/6

IP09CP

PoE Extender over Coaxial cable

To extend IP/POE camera over Coaxial/CAT5e/6 cable.

- Power from either a PoE switch or an external power adapter



IP04 PoE Repeater

To extend PoE signal(power and data) beyond 100M over CAT5e cable.

- Allow to use multiple repeaters for long distance transmission.
- No external power required.
- Max transmission distance: 120M



P/PoE Surge Protector



SP-6 Network Surge Protector

To protect Network equipment (four pair protection) from high voltage surges from nearby lightning strikes.

- Perfect for IP camera, network, PC modem, server



SP-6P PoE Surge Protector

To protect PoE equipment from high voltage surges from nearby lightning strikes.

- Support Mid-Span PoE and End-Span.

SP006PH

High Performance 1G PoE Surge Protector

To protect 1G PoE equipment from high voltage surges from nearby lightning strikes.

- Support Mid-Span PoE and End-Span



SP006PHO

High Performance Outdoor 1G PoE Surge Protector

To protect outdoor 1G PoE equipment from high voltage surges from nearby lightning strikes.

- Support high power 90W pass-through

SP016P

16 Channel PoE Surge Protector in 1U Rack

To protect up to 16 devices of 1G PoE equipment from high voltage surges from nearby lightning strikes.



HDMI Surge Protector

SP8

HDMI Surge Protector

(HDMI Male to HDMI Female Connection)

- Provide surge protection for HDMI equipment.



HDMI TRANSMISSION

HE01ERK Passive HDMI CAT5e Extender 40M

Special design to extend HDMI signal of DVR/NVR over one CAT5e cable

- No external power required.



HE02EIP

4K HDMI & IR/Power CAT5e Extender 70M

To extend HDMI and IR signal and power over one CAT5e cable.

- Uncompressed high definition video
- Support PoH (Power over HDBaseT), no external power required at receiver



HE03

HDMI CAT5e Extender with HDMI Loop Out 150M

To extend HDMI signal over one Cat5e/CAT6 cable.

- Built-in HDMI local Loop Out



HE03-4K

4K HDMI CAT5e Extender 140M

To extend 4K UHD HDMI signal over one CAT5e cable.

- Max transmission distance: 120M(CAT5e), 140M (CAT6)



HC01

HDMI to Composite Video with Stereo Audio Converter

To convert HDMI or DVI video signals to analog composite video with stereo audio.

- Support Stereo audio output.
- Built in HDMI loop output.
- Input Resolution: up to 1920 x 1080@60Hz.
- Output: NTSC, PAL



HDMI over Coax Transmission

HE01C

HDMI over Coax Extender

To send HDMI signal over single coaxial cable.

- Max transmission distance: 100M at 1080p



HE05C

HDMI over Coax (Digital RF DVB-T) Extender

To send HDMI signal over coax cable by DVB-T RF Modulator technology.

- Support multiple inputs to multiple displays application by working with RF splitter/mixer.
- Transmitter built-in HDMI Loop Out.
- Applications for hotels, hospitals, schools, shops



- where need meeting video distribution, digital signage, student training broadcasting, DVD Blue Ray players video distribution, surveillance..etc.
- Max transmission distance: 500M at 1080p

HDMI Switcher

HS04

4 input x 1 output HDMI Switcher

Allows multiple digital sources to share one video display.


- Easily control by front panel or IR remote control
- Resolution: up to 1080p @ 60Hz



HM41E

4 x 1 HDMI Seamless Switcher & Multiviewer (for 4 x DVR's/NVR's to display in one monitor) To switch seamlessly one of four inputs and five multiview mode to one HDMI output.

- Easily control by front panel, IR remote control, RS232
- Support auto-switching function in Mode 1.
- Support different mode display: Quad, picture on picture (POP) and full screen display. Resolution: up to 1080p @ 60Hz

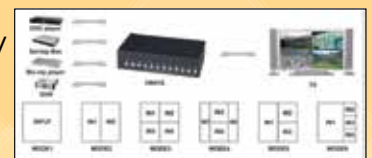

CP01SE

HDMI CAT5e Extender with Passive Receiver 60M

To extend HDMI signal over one CAT5e cable.

- No power required at receiver side. (CP01SER)



HE02E

4K HDMI CAT5e Extender 100M

To extend HDMI signal over one CAT5e cable.

- Uncompressed high definition video



HKM01E

HDMI & USB Keyboard Mouse CAT5e Extender 150M

To extend HDMI and USB keyboard mouse signals over one CAT5e cable.

- Transmitter built-in HDMI loop output.
- Receiver unit built-in USB port x 2 for keyboard and mouse.
- Option model: SR01X signal repeater for longer distance application.



HKM01-4K

4K HDMI & USB, Audio, RS232, IR CAT5 Extender 140M

To extend HDMI, RS232, IR and USB signal over one CAT5e cable.

- Transmitter unit built in HDMI loop output.
- Receiver unit built-in USB 2.0 port x 4 for extending USB peripheral device.
- Support bi-directional analog audio and one directional IR transmission.
- Max transmission distance: 120M(CAT5e), 140M (CAT6)



HDMI Distributor Amplifier

HD02-4K

4K 1 x 2 HDMI

Distribution Amplifier

- To distribute one HDMI input to two identical outputs.

HD04-4K6G

4K60Hz 1 x 4 HDMI

Distribution Amplifier

- To distribute one 4K60Hz HDMI input to four identical outputs.



HDMI Dist. Amp. Extender

HE04SEK

1 x 4 HDMI Distribution Amplifier CAT5e Extender. To distribute and extend one HDMI signal to 4 remote HDMI displays over CAT5e cables.

- Transmitter built-in HDMI Loop Out for local display or stack to another HE04SET for multiple displays.
- No power required at receiver side. (HE01SER)
- Resolution: up to 1080p 60Hz
- Max transmission distance: 40M at 1080p



HD-TVI/AHD/HDCVI/CVBS TRANSMISSION

**VB-4
Analog 1**
Single Channel Passive
Video Transceiver



**VB-11HD
Mini Video Transceiver**



- To send HD-TVI/AHD/HDCVI / CVBS signal over UTP cable.
- BNC male to screw terminal for easy connection.
- Compact and mini size, could mount multiple units behind multiplexer, Quad, DVR

**VB-12HD
HD Mini Video
Transceiver with coax pigtail**



- To send HDCVI /CVBS signal up to 400M over UTP cable.
- To send HD-TVI/AHD signal up to 250M over UTP cable.
- BNC male to screw terminal with 10cm mini coax cable for easy connection.

**VB-14HD
HD 4 Channel HD-TVI
/AHD/HDCVI/CVBS
Video Transceiver**

- Transmit a full color video signal up to 300 meters.
- Distance Up to 1Km when used with an active receiver



**VB-18HD
HD HD-TVI/AHD/HDCVI/
CVBS Video & Power Balun**

- Transmit HD-CVI/TVI/AHD video and power over one CAT5e cable.
- Include 2 units: 1 x RJ45 to BNC with DC power plug, 1 x RJ45 to BNC with DC power jack.
- Eliminate coaxial & power cable.



**VB-116HD
HD 16 port HD-TVI/AHD/
HDCVI HD Video Transceiver in
1U Rack Mounting Panel**

- Choice of RJ45 or push pin terminal inputs/outputs



**TTA111HDR
HD-TVI/AHD/HDCVI/
CVBS UTP Active Receiver**

- HD-TVI, AHD, HDCVI UTP active receiver.
- Support HD-TVI/AHD/HDCVI 1080p/4K



**TTA111HDT
HD-TVI/AHD/HDCVI/CVBS UTP
Active Transmitter**

- To send HD-TVI signal up to 300M over UTP cable.
- To send AHD signal up to 400M over UTP cable.
- To send HDCVI signal up to 500M over UTP cable.
- Support resolution up to 1080p and 4K.



Coaxial Cabling Solutions (Distributor)

**CD102HD
1 Input to 2
Output HD-TVI/
AHD/HDCVI/
CVBS Video**

- Distributor with up to 4K resolution



**VDA-1
1 Input to 2
Output CVBS
Video Distribution
Amplifier**



**VDA-4HD
1 Input to 4
Output HD-TVI/
AHD/HDCVI/
CVBS Video**

- Distributor with up to 4K resolution



**VD-108HD
1 Input to 8
Output HD-TVI/
AHD/HDCVI/
CVBS Video**

- Distributor with up to 4K resolution



**VD-408HD
4 Input to 8
Output HD-TVI/
AHD/HDCVI/
CVBS Video**

- Distributor with up to 4K resolution



Rack Mountable HD-TVI/AHD/HDCVI/CVBS Video Distribution

Support HD-TVI, AHD, HDCVI, CVBS, NTSC, PAL video signal.

Support high resolution up to 4K/1080P without any video loss.



CD816HD

8 Video input to 16 video output



CD1632HD

16 Video input to 32 video output



CD1664HD

16 Video input to 64 video output



VA-101HD
HD-TVI/AHD/HDCVI/CVBS
Video Amplifier

- To boost HDTV, AHD, HDCVI signal for longer distance over coax cable.
- Support HD-TVI 1080p/720p 500M
- Support HDCVI 1080p/720p 700M
- Support AHD 1080p/720p 700M
- Built in middle frequency, high frequency and brightness adjustment

Amplifiers



CA101HDP
HD-TVI/AHD/HDCVI/CVBS
Video & Power Over One Coax

- Maximum Transmission Distance: HD-TVI @ 300M, AHD @ 400M, HDCVI @ 400M, CVBS @ 400M
- Support Camera Power Output: DC12V

HD-TVI/AHD/HDCVI/CVBS Converter

AD001HD1
HD-TVI/AHD/HDCVI
to CVBS Converter
with loop out

- Converts AHD/HD-TVI/HDCVI signal to composite video.
- Built in local loop output.
- Input support: AHD/HD-TVI/CVI, 720p@25/30, 720p@50/60hz, 1080p@25/30Hz




AD001HD4
HD-TVI/AHD/HDCVI/CVBS
to HDMI/VGA/CVBS Converter
with Loop Out

- Converts HD-TVI/AHD/HDCVI/NTSC/PAL/960H signal to HDMI, VGA, Composite Video or loop out.
- Input support: HD-TVI AHD/HDCVI support:720p@25/30/50/60 1080p@25/30Hz.
- Output support: HDMI, VGA, Composite Video or loop out.



AD001UHD4
4k HD-TVI/AHD/HDCVI
to 4K HDMI Converter
with Loop Out

- Converts HD-TVI/HD-CVI/AHD signal to HDMI signal.
- BNC input supports: 1MP/1080p/4MP/5MP up to 4K (8 MP)
- HDMI output up to 4K @ 30Hz

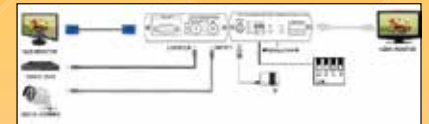

Video Interference / Power Center

G-01
Passive Analog Coaxial
Video Ground Loop Isolator

- To eliminate ground loop which leads to distortion of video such as tearing or rolling
- No power required.



GL001HD(P)
Passive HD-TVI/AHD/HDCVI/
CVBS Ground Loop Isolator

- To eliminate ground loop which leads to distortion of video such as tearing or rolling
- No power required.



GL001HP-1A
HD-TVI/AHD/HDCVI
/CVBS 1 Amp Power Isolater

- To eliminate ground loop which is caused by power cables laid together with video/data cables.
- Prevents ground loop interference.
- Prevents the interference caused by power cables laid together with video/data cables



PCC-500
AC to DC 12V Power
Converter 500 mA

- Allows DC powered camera to be powered by AC



PDB-1
1 Input to 9 Output
Power Distribution Box

- Individually protected PTC*-type output fuse rated 1.1Amps@250VAC.
- Individual status LED indicators.
- Surge protected outputs.



PCC-2A
AC to DC 12V
Power Converter 2 Amp

- Allows DC powered camera to be powered by AC



HD-TVI/AHD/HDCVI/CVBS SURGE PROTECTION

SP-9

4K HD-TVI/AHD/HDCVI/CVBS Surge Protector

- BNC male to BNC female.
- Provide protection for HD-TVI, HDCVI, AHD, CVBS camera & DVR devices



SP016HD

4K16 Channel HD-TVI/AHD/HDCVI/CVBS Surge Protector in 1U Rack

- 16 x BNC male to 16 x BNC female.
- Provide protection for analog HD-CVI, HD-TVI, AHD camera, DVR devices




VGA Transmission

VE-01H

Active High Resolution VGA VAT5e Extender

- Supports high resolution up to 1920 x 1200 at 70 meters.
- Receiver unit acquires power from transmitter



VIDC-01

VGA to Composite Video Converter

- Resolutions support: 640 x 480 (up to 85 Hz), 800 x 600 (up to 85 Hz) and 1024 x 768 (up to 75 Hz).
- Input port: VGA (DB15).
- Dual output ports: composite video (BNC connector), VGA (DB15).



VGA-2HR

CVBS to VGA Converter with Loop Out

- Special designed for computer VGA monitor, LCD color monitor.
- Dual output: DB15 x 1 for VGA monitor and BNC x 1 for TV monitor.
- Support NTSC, PAL video system.



VGA-3HR

CVBS to HDMI/VGA Converter

- Special designed for computer VGA/HDMI monitor, LCD color monitor.
- Input: composite video input via RCA, Output: Video(CVBS), VGA, HDMI output
- Support NTSC, PAL video system



VGA-201

CAT5 VGA 1 Input to 2 Output Distributor

- Dual output: 1 VGA loop output for local, plus 1 CAT5 RJ45 output for remote side.
- Use CAT5 cable instead of VGA cable.
- Long range transmission up to 300 meters
- Built in contrast, brightness adjustment at Receiver.
- Supports up to 1600 x1200 @85Hz.



Audio Transmission (IP/Coax)

AM-2 Audio Pick Up Box

- Add-on mini audio box for all coax cameras that require an audio function.



AM-3 Mini Hidden Type Microphone

- Add-on mini hidden audio board for all coax cameras which need audio function.



AA002PJ Audio Pick Up Box with 3.5 mm Phone Jack for IP Camera

- Add-on mini audio box for all IP cameras that require an audio function



AAA003PJA Mini Hidden Audio Pick Up Box with 3.5 mm Phone Jack for IP Camera

- Add-on mini audio box for all IP cameras that require an audio function



DVR Lockboxes

DVR Lockboxes with cooling fans are made of super strong 16 gauge steel with removable lid for easy access, locking front door with cam lock and 2 keys, air vents, cooling fan(s) and power cord(s) for superior cooling, rubber bumpers and durable textured powder coat finish.

- LB-18-18-5 18 X 18 X 5
- LB-21-21-8 21 X 21 X 8
- LB-21-24-8 21 X 24 X 8
- LB-21-24-13 21 X 24 X 13



All lockboxes are designed to fit our custom wall bracket. (Available in Horizontal or Vertical)



Wall Mounting Brackets

Lockboxes are securely through bolted to bracket support arms for maximum protection against theft or vandalism.

- LB-HWB: Horizontal Bracket
- LB-VWB: Vertical Bracket

CONNECTORS & TOOLS

COMPRESSION CONNECTORS

SB-016 Series BNC Male Compression

SB-016B For RG-59/U
SB-016C For RG-6/U
SB-016BP For RG-59/U Plenum



SF-867 Series F Male Compression

SF-867B2 For RG-59/Uc
SF-867C2 For RG-6/U
SF-867CQ2 For RG-6/U Quad Shield



SR-1020 Series RCA Compression

SR-1020B For RG-59/U
SR-1020C For RG-6/U



SB-105 Series

BNC Male Crimp 3 PC Construction
SB-105B for RG-59/U
SB-105C for RG-6/U
SB-105D for RG-179/U
SB-105U Universal: for RG-59/U & RG-59U Plenum



SB-132

BNC Double Female Bulkhead Adapter



SB-156

BNC Female to RCA Male



SB-106 Series

BNC Males Twist-On
SB-106B for RG-59/U
SB-106BP for RG-59/U Plenum
SB-106C for RG-6/U



SB-133^c

BNC Double Male Adapter



SB-161 Series

BNC Female Crimp 2 PC Construction
SB-161B for RG-59/U
SB-161BP for RG-59/U Plenum
SB-161C for RG-6/U



SB-114 Series

BNC Male Crimp 2 PC Construction
SB-114B for RG-59/U
SB-114BP for RG-59/U Plenum
SB-114C for RG-6/U
SB-114CP for RG-6/U Plenum
SB-2219D for RG-179/U Mini-Max



SB-134

BNC Adaptor One Male Double Female



SB-162

BNC Female to Double Male T Type



SB-116B

BNC Male Terminator 75 OHMS



SB-135

BNC Right Angle One Male One Female



SB-164

BNC Male to BNC Female



SB-120 Series

BNC Female Twist-On
SB-120B for RG-59/U
SB-120BP for RG-59/U Plenum
SB-120C for RG-6/U



SB-136^c

BNC Adapter Three Female



SB-166

BNC Three Male T Adaptor



SB-128

BNC Double Female Adapter



SB-144^c

BNC Male to RCA Male



SB-169

BNC 90 Degree Type: Male/Female/Female



SB-146

BNC Male to RCA Female



SB-170

BNC Male to Two Female Right Angle



SB-147

BNC Male to F Female



SB-171

BNC One Male to Two Female Y Type



SB-150

BNC Female to F Male

TOOLS

CF-5068

Multi-Function telephone tool crimps, cuts and strips for easy on-the-job tool application. For RJ-45/11, RJ-12/11 Modular Connector Steel Frame



EZ-RJ45 Tool Pro

Professional Heavy Duty Termination Crimp Tool. Crimps and trims in one cycle.



DL-7501A

Cable Stripper: for Coax & Flat Cable



DL-8073RC

3 in 1 Compression Tool: for BNC, RCA & F Compression Connectors



HT-801C

Ratchet Compression Crimping Tool for RG-59/U RG-6/U



F & RCA CONNECTORS

SF-804B

F Male with attached 1/2" Grip Ring for RG-59/U

SF-804C

F Male with attached 1/2" Grip Ring for RG-6/U



SF-806

Universal F Male Crimp with attached 3/4" Grip Ring (for RG-6/U Quad, Tri, Plenum & PVC)



SF-810B

F Male Twist-On For RG-59/U



SF-810C

F Male Twist-On For RG-6/U

SF-818

F Double Female Bulkhead



SR-1002

RCA Female to F Male



SR-1004

RCA Male to F Female



SR-1005

RCA Double Female



SR-1010

RCA Double Male Bulkhead



SR-1013

RCA Double Male



MODULAR PLUGS

RJ45 CAT5E/CAT6 Modular Plugs

#105 CAT5E RJ45 Modular Plug
8P8C Round Solid Cable -
100 Each/Bag



#106 CAT6 RJ45 Modular Plug
8P8C Solid Cable -
100 Each/Bag

EZ-RJ45[®] Connector

- Simplifies twisted pair terminations
- Inserted through the connector, out the front
- Reduces scrap, no wasted crimps
- More reliable, higher performance



EZ-RJ45-CAT5

Connectors For Cat5e Utp Cables - 100 Ea/Jar

EZ-RJ45-CAT6

Connectors For Cat6 Utp Cables - 100 Ea/Jar

MULTIPLE OUTPUT CCTV CAMERA POWER SUPPLIES

24V AC Power Supplies

PS-9AC/5A

Voltage: 24VAC
 Output: 5 AMP
 Protection: PTC Resettable Fuses
 Dimensions: 8.25" (L) X 9.75" (W)
 X 2.75" (H)
 Housing: Wall Mountable Metal Box



PS-18AC/10A

Voltage: 24VAC
 Output: 10 AMP
 Protection: PTC Reset-able Fuses
 Housing: Wall Mountable Metal Box



CP-4A

4Amp Adapter Terminal Type

- 4CH 12V DC 4Amp adapter
- Input: 100 ~ 240V, 50~60Hz, 1.6A
- Output: 11 ~ 15V, 4000mA
- Fuse: PTC2A/Channel
- CE, FCC, UL Listed, CB, VI efficiency level

12V VDC Power Supplies

PS-4DC/5A

12VDC Power Supply – 4 Channel – 5 AMP

Voltage: 12VDC
 Output: 5 AMP
 Protection: PTC Reset-able Fuses
 Dimensions: 8" (L) X 10" (W) X 3.5" (H)
 Housing: Wall Mountable Metal Box



PS-9DC/5A

12VDC Power Supply – 9 Channel – 5 AMP

Voltage: 12VDC
 Output: 5 AMP
 Protection: PTC Reset-able Fuses
 Dimensions: 8" (L) X 10" (W) X 3.5" (H)
 Housing: Wall Mountable Metal Box



PS-18DC/10A

12VDC Power Supply – 18 Channel – 10 AMP

Voltage: 12VDC • Output: 10 AMP
 Protection: PTC Reset-able Fuses
 Dimensions: 8" (L) X 10" (W) X 3.5" (H)
 Housing: Wall Mountable Metal Box



12VDC-16P13A-RM

12VDC Power Supply – 16 Channel – 13 AMP

Rack Mount UL Power Supply

Voltage: 12VDC
 Output: 13 AMP



UL Listed Power Supplies

12VDC UL LISTED POWER SUPPLIES with PTC Resettable Fuses



4P12VDC/5A UL..... 4 PORT 5 Amps
 9P12VDC/5A UL..... 9 PORT 5 Amps



9P12VDC/10A UL..... 9 PORT 10 Amps
 18P12VDC/10A UL... 18 PORT 10 Amps



12VDC-18P/20A

12VDC Power Supply 18 Channel - 20 AMP IDEAL FOR IR CAMERAS

Protection: PTC Reset-able Fuses
 Housing: Wall Mountable Metal Box



12VDC18P/30A (UL)

Master Power Supply 12VDC, 18 CH, 30 AMP

- Input: 110-220VAC 50/60HZ. Output: 12VDC, 30AMP
- 18 Channel
- Fuse Type: Individual PTC Fuse for each Port
- Dimension (L x W x H): 10.03 x 8.18 x 3.54 inches (255 x 208 x 90mm)
- Warranty: 2 Year
- Certificate: UL,CE,FCC,ROHS

Plug-in Transformers

24VAC Class II Plug-In Power Supply

CP-2420
 Input: 120V, 60Hz Output: 24VAC ~ 20VA
 CP-2450
 Input: 120V, 60Hz Output: 24VAC ~ 50VA



All Units: White Housing with Green Led, Two Screw Terminal Output, Individually Boxed & UL Listed.

Regulated Power Supplies



MARS-1000R



DC-2000R



MARS-5000R
 Shown with optional PT-14

12VDC DC Plug-in Switching Power Supplies

MARS-1000R Primary:120/240VAC 50/60Hz Secondary:12VDC 1000 MAa
 DC-2000R Primary:120/240VAC 50/60Hz Secondary:12VDC 2000 MA
 MARS-5000R Primary:120/240VAC 50/60Hz Secondary:12VDC 5000 MA
 All Units: 2.1 mm plug, Fully Regulated, Individually Boxed & UL Listed.

CABLING



RG59 BNC COAX Jumper Cable Male to Male

- RG 59U Cable Assembly with BNC Male connector on each end.

BB-1 1 FT
 BB-2 2 FT
 BB-3 3 FT
 BB-6 6 FT

Black Only.



BNC to BNC Jumper Cables Mini RG-179/U 75 OHM Cable

BMB-3 3 FT
 BMB-6 6 FT
 BMB-13 13 FT
 BMB-33 33 FT

BMB-3 - available in black, red or yellow.
 BMB-6, 13 & 33 - Black only.



CAT 5E PVC CALL
 CAT 5E 350 MHz, 24 AWG,
 PVC Available in Various
 Colors
 1000 FT Per Box
 UL Listed



HD Plug & Play Cables

HD BNC Cable with Power

Pre-made CCTV Security Camera Cables

- Can be used with any type of CCTV Camera: HD-SDI, HD-TVI, HD-CVI & 960H Analog
- BNC Male to Male Video
- 2.1 mm Male to Female Power
- Black Cable Only



HDC-33 33 FT
 HDC-65 65 FT
 HDC-100 100 FT
 HDC-165 165 FT

HD BNC Cable with Power & Audio Pre-made CCTV Security Camera Cables

- Can be used with any type of CCTV Camera: HD-SDI, HD-TVI, HD-CVI & 960H Analog
- BNC Male to Male Video, RCA Male to Male Audio & 2.1 mm Male to Female Power
- Black Cable Only



HDC-A33 33 FT
 HDC-A65 65 FT
 HDC-A100 .. 100 FT
 HDC-A132 .. 132 FT

PT-3

2.1 mm Female DC Plug with Flying Leads



PT-4

2.1 mm Male DC Plug with Flying Leads



PT-6N

Y-Power 2.1mm Male DC Plug to Dual Female Plug



PT-14

2.1 mm Male DC Plug to 4 Female Plugs



PT-18

Power Splitter DC 1 Male to 8 Female Adapter Cable for CCTV Security system



MODULAR WIRING ACCESSORIES

Also available with Anti-Corrosion Gel

CPI-B B Connectors, 1000 pcs per Box (10 X 100)
 CPI-BGEL GEL B Connectors, 1000 pcs per Box (10 X 100)



P-008

DC Plug to removable terminal block

- Small size for tight spaces.
- 2.1mm DC plug.
- 10 pieces/ Bag



P-009

DC Jack to removable terminal block Small size for tight spaces.

- 2.1mm DC Jack
- 10 pieces/ Bag



SIAMESE COAX CABLE

This type cable is great for use with CCTV equipment. All the wires you need to connect your camera eliminating the need for two separate cables for the power and video. This cable is easy to run and will also save you a considerable amount of time during installation.

- RG-59/U Cable & 18/2 Power
- 95% Copper Braid



1526-L 500 FT Siamese Coax Cable

1526-M 1000 FT Siamese Coax Cable

Available in Black or White

NEMA3R Rated Outdoor Enclosures

Ideal for protecting Access Control Panels, CCTV Recorders, Batteries, Power Supplies, Traffic Systems and more.



NEMA3R rated enclosures are weather-resistant; protecting against falling dirt and against weather hazards such as rain, sleet and snow, and is undamaged by the formation of ice. Used outdoors on ship docks, in construction work, and in tunnels and subways.



POPULAR ADD ONS:

- Lockable Handle
- 150W Heater with automatic thermostat (59 Degrees F)

- All Enclosures come with a thermostatically controlled fan installed.
- All enclosures come with a sunshade, insulation, cam lock, adjustable back plate/shelf, and universal wall/pole mounting brackets.

Sizes

12X12X6
 12X12X11
 16X16X6
 16X16X10
 19X19X12
 20X22X22
 27X22X13
 (comes with 2 thermostatically controlled fans)

ALL PRICES SUBJECT TO POTENTIAL TARIFF'S AND MAY CHANGE WITHOUT PRIOR NOTICE

CALL TODAY TO ORDER: 1-866-666-9004

Connectors
 Plus

BODY TEMPERATURE DETECTION

Body Temperature Detection Network
Camera & Infrared Calibrator
for Temperature Accuracy

SEC-BODYTEMPCAM & SEC-BBCT



2MP HD Temperature
Measurement & Face Recognition
Terminal with Questionnaire

High-Accuracy, Zero-Contact
Infrared Body Temperature Measurement
with or without a Mask!

PAR-P2TEMPTABLET

Infrared Thermometer,
Forehead, Non-contact Type
HET-R121



Wrist Temperature Measurement Device

Measure & Record Body Surface Temperature
using the Wrist with Door Lock Control Functions

IN-TEMPWRIST

Call Today to Order: 866.666.9004 | connectorsplusinc.com



561.588.8166 • Fax 561.588.8644 • info@connectorsplusinc.com

ALL PRICES SUBJECT TO POTENTIAL TARIFF'S AND MAY CHANGE WITHOUT PRIOR NOTICE. Not responsible for typographical errors.